

B7

CHAPTER



FISCHER CORE SERIES STAINLESS STEEL

ULTRA-RESISTANT | STERILIZABLE | EASY TO HANDLE

KEY FEATURES

- IP68 or hermetic
- Nuclear decontamination fluids compatible
- Easy to handle with gloves or remotely



STAINLESS
STEEL

STAINLESS STEEL



PLUGS



CABLE MOUNTED

- Body styles (ST-S; ST-ST) B 7-4
- Technical dimensions B 7-5

RECEPTACLES



PANEL FRONT MOUNTED

- Body styles (ST-DBEE) B 7-6
- Technical dimensions B 7-7



PANEL REAR MOUNTED

- Body style selection (ST-DBPE) B 7-6
- Technical dimensions B 7-7

FEEDTHROUGH



PANEL FRONT MOUNTED

- Body styles (ST-WDE 103/105/107) B 7-6
- Technical dimensions B 7-8


FOR ALL STAINLESS STEEL

- Size selection B 7-3
- Electrical & contact configurations B 7-10
- Options B 7-17
- Part numbering B 7-18
- Cable clamp sets B 7-20
- Accessories B 7-24
- Tooling B 7-25
- Technical information B 7-28
- Product specifications A-5

This catalog covers our standard connector solutions. For specific requests, including hybrid or custom connectors, please contact your local sales representative.

AVAILABLE SIZES

CONNECTOR SIZE
VERSUS
CABLE DIAMETER

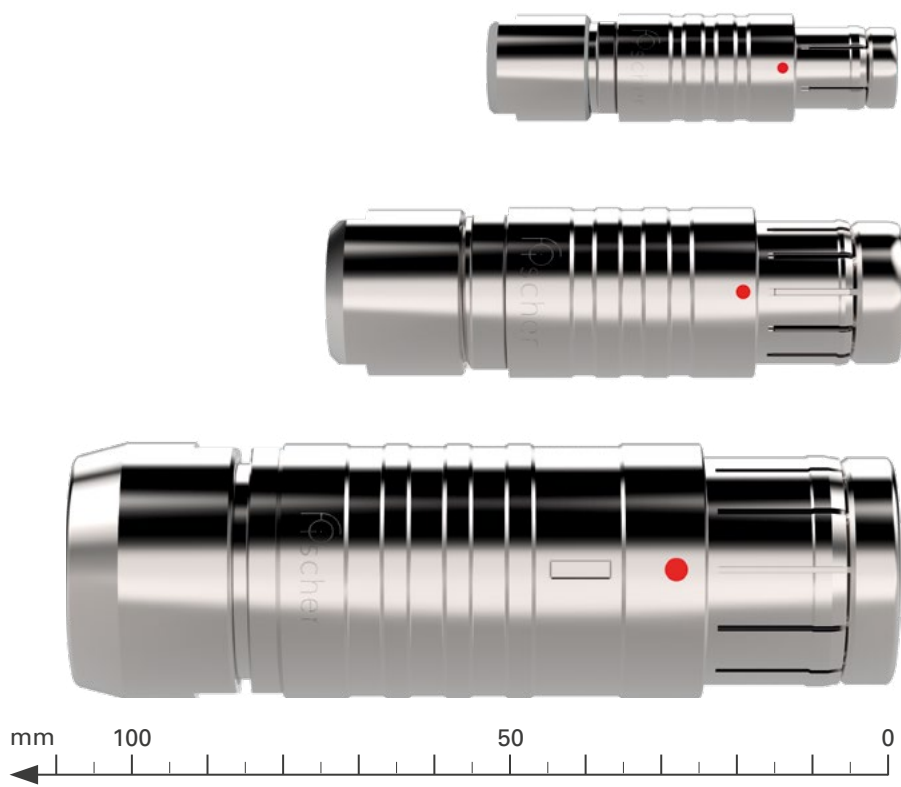

Series	Multipole low voltage		
	Min cable ø	Max cable ø	Number of contacts
103	1.7	6.7 (6.2) ¹⁾	2-12
105	1.5	10.7	2-27
107	5.7	22.7	4-55

¹⁾ For max cable ø, values in parenthesis are valid for sealed connectors (IP68).

STAINLESS
STEEL

All dimensions and images shown are in millimeters and are for reference only.

PLUGS**CABLE
MOUNTED**


Body style		ST-S	ST-ST	References to detailed information
Protection	Unsealed (IP50)	●	●	Sealing categories, section A-6
	Sealed up to IP68	●	●	
Locking system	Friction			Locking systems, page A-5
	Push-pull	●	●	
	Quick-release			
	Lanyard			
	Tamperproof			
Contacts	Crimp	●	●	Electrical & configurations, page B 7-10
	Solder	●	●	
Housing	Standard	●		Options, page B7-17
	Remote handling		●	
Design	Shortened body			Body styles, chapter B7-4
	Straight	●	●	
	Right-angle			
Cabling	Cable clamp sets	●	●	Cable clamp sets, page B7-20
	Overmoldable			
	Heat shrinkable			
Accessories	Cable bend reliefs			Accessories, pages B6-10 and B7-24
	Protective sleeves	●	●	
	Sealing caps	●	●	
Size	103 Series	●		Technical dimensions, page B7-5 For more information visit our website www.fischerconnectors.com/technical
	105 Series	●		
	107 Series	●	●	

PLUGS

CABLE
MOUNTED

ST-S

BODY STYLE

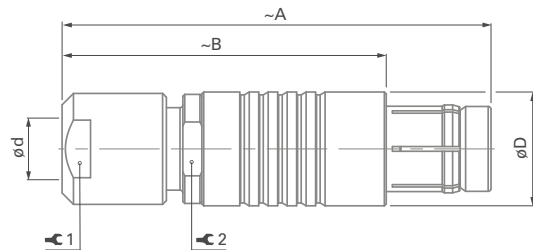


Series	A	B	D	d max			Torque 1 [Nm]	
				Unsealed	Sealed			
103	46	35	12	6.7	6.2	10	1.0	10
105	62	47	18	10.7	10.7	15	3.5	16
107	110	85	34	22.7	22.7	32	10.0	32

Torque [Nm] are recommended values that may be influenced by the characteristics of the cable jacket. Tests must be conducted to evaluate the exact values. To secure the cable clamp nut, we recommend the use of thread locking adhesive.

CABLE
MOUNTED

ST-ST

BODY STYLE

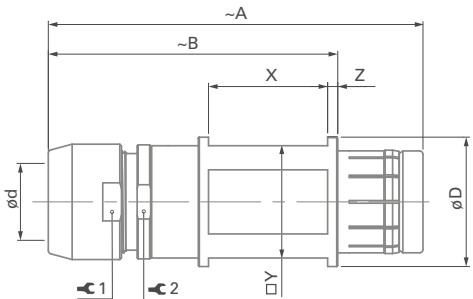

Series	A	B	D	d max			Torque 1 [Nm]	
				Unsealed	Sealed			
107	110	85	38	22.7	22.7	32	10.0	32

Series	X	Y	Z
107	35	33	3

RECEPTACLES**PANEL
MOUNTED**


Body style		ST-DBEE	ST-DBPE	ST-WDE	References to detailed information
Protection	Unsealed (IP50)				Sealing categories, page A-6
	Sealed up to IP68	●	●	●	
	Hermetic	●	●	●	
Contacts	Crimp				Electrical & contact configurations, page B 7-10
	Solder	●	●		
	PCB	●	●		
Housing color	Natural chrome	●	●	●	Options, page B 7-17
	Black chrome	●	●		
Design	Right-angle				Body styles, page B 7-6
	Flush		●	●	
	Front-projecting	●		●	
	Rear-projecting		●		
	Bulkhead feedthrough			●	
Assembly	Front-mounting	●		●	Accessories, pages B 7-24, B 6-16 and B 6-18
	Rear-mounting		●		
Accessories	Sealing caps	●	●	●	
	Spacers			●	
	Color-coded washers				
	Grounding washers	●	●		
	Locking washers	●	●		
	103 Series	●	●	●	Technical dimensions, page B 7-7 For more information visit our website www.fischerconnectors.com/technical
	105 Series	●		●	
	107 Series	●		●	

RECEPTACLES

PANEL FRONT MOUNTED

ST-DBEE


BODY STYLE



Series	A	B max.	C	C1	D	M	1	Torque 1 [Nm]	2
103	23	4.0	13.0	3.0	18	14x1	17	3.0	14
105	32	5.0	19.0	4.0	27	18x1	22	6.0	22
107	47	5.0	24.0	5.0	45	36x2	TX00.107	16	38

PANEL CUT-OUT


Series	d
103	14.1
105	18.1
107	36.2



PANEL REAR MOUNTED

ST-DBPE


BODY STYLE

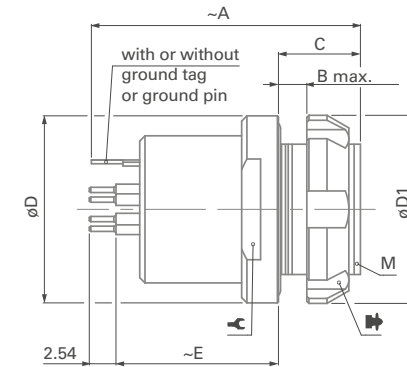

Series	A	B max.	C	D	D1	E	M	1	2	Torque [Nm]
103	26	3.0	7.8	18	18	15.5	14x1	15	TG00.001	3.0

PANEL CUT-OUT

Series	D
103	14.1




FEEDTHROUGH

PANEL FRONT
MOUNTED


ST-WDE 103

BODY STYLE



ST-WDE 105


BODY STYLE

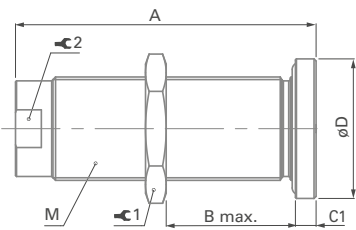

Series	A	B max	C	C1	D	M	⌘ 1 ¹⁾	Torque 1 [Nm]	⌘ 2
103	40	23	14	4	17	12x1	14	2.5	14
105	62	46	-	4	27	20x1	22	6.5	17

PANEL CUT-OUT

Series	d
103	12.1
105	20.1



The bulkhead feedthrough connector allows the passing of electrical signals and power through a panel via two cable plugs.

The "AZ" version of the feedthrough accepts a type "A" plug on the flange side and a type "Z" plug on the threaded end, which is typically oriented toward the interior of the chassis. In the version "ZA" the connections "A" and "Z" are inverted.

Dimension "B max" specifies the maximum panel thickness. For panels thinner than the unthreaded section "E min", we can provide spacers as shown accessories section, page B6-16.


¹⁾ Assembly tool for side hex nut, see Accessories section, page B7-25.

FEEDTHROUGH

PANEL FRONT MOUNTED

ST-WDE 107


BODY STYLE



Series	A	B min/max	C1	D	E min	M	 ¹⁾	Torque 1 [Nm]
107	92	20/76	5	45	20	36x2	TX00.107	17

PANEL CUT-OUT

Series	d
107	36.2



The bulkhead feedthrough connector allows the passing of electrical signals and power through a panel via two cable plugs.

The "AZ" version of the feedthrough accepts a type "A" plug on the flange side and a type "Z" plug on the threaded end, which is typically oriented toward the interior of the chassis. In the version "ZA" the connections "A" and "Z" are inverted.

Dimension "B max" specifies the maximum panel thickness. For panels thinner than the unthreaded section "E min", we can provide spacers as shown in accessories section, page B 6-16.

¹⁾ Assembly tool for side slotted nut, see Accessories section, page B 7-25.

Torque [Nm] are recommended values that may be influenced by the quality of the panel surface. Tests must be conducted to evaluate the exact values.

A/Z POLARITY

To protect users from contact with dangerous voltages, most of our connectors exist in two versions:

STANDARD "A" POLARITY

The contacts of the receptacle are protected against accidental touch.

Recommended when voltage is present on the receptacle.

INVERTED "Z" POLARITY

The contacts of the plug are protected against accidental touch.

Recommended when voltage is present on the plug.

	Receptacle ST-DBEE	Plug ST-S/ST-ST
Type "A" Standard Polarity		
Type "Z" Inverted Polarity		


IMPORTANT: AN "A" TYPE CONNECTOR CAN NEVER BE MATED WITH A "Z" TYPE CONNECTOR.

A plug "ST-S" has the same housing in type "A" as in type "Z", but type "A" comes with unprotected contacts while type "Z" is equipped with

touch-protected contacts. In most cases these are female contacts which are recessed in the insulator.

BULKHEAD **FEEDTHROUGH WDE**

Type "AZ" is the standard version of the ST-WDE. The flange side accepts an "A" type plug, and the threaded side accepts a "Z" type plug.

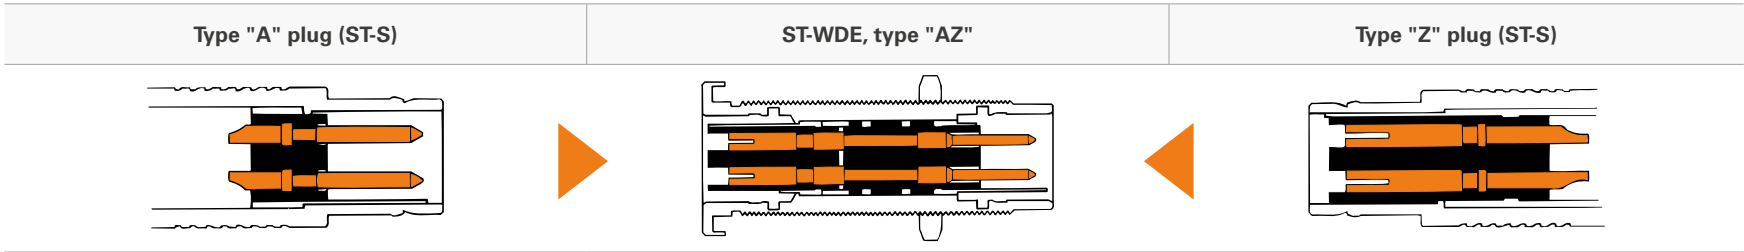

The "ZA" version of the ST-WDE accepts a type "Z" plug at the flange side and accepts a type "A" plug at the threaded end.

CONTACT TYPES

The Fischer Connectors' contact designs are highly reliable and are guaranteed up to 5,000 mating cycles.

All standard brass and bronze contacts for use in the Core Series are screw machined, and all are gold plated over a nickel underplate.

Most connectors are available with solder, crimp or PCB contacts and each type is optimized for a particular application.

SOLDER CONTACTS

Most versatile
Pre-installed contacts
Qualified assemblers required



- Can be produced with any type of contact block material and accept a wide range of wire sizes.
- Contacts are pre-installed in the insulator block, and the wires can be terminated with any appropriately sized soldering iron.
- May require operators who are qualified in specialized soldering techniques.

PCB CONTACTS

PCB or Flex circuit mount
Reduced pin diameter
Wave soldering



- Designed to be mounted directly onto a PCB or flex circuit, can be used in wave soldering operations for faster production assembly.
- Preferred for high rates of data transmission due to the low distance to the board that their integration allows. This helps reducing signal perturbations.
- PCB pins are generally used on rear mounted panel connectors.

CRIMP CONTACTS

Selectively annealed area
Special tools required
Limited range of wire sizes



- Each contact has a selectively annealed area which is deformed during assembly by specialized tooling to assure proper termination of the wire to the contact.
- Commonly used for field termination or repair, as no soldering process is required.
- Not available for sealed or hermetic connectors.

CONTACT TYPES

CRIMP CONTACTS



- Selectively annealed area
- Special tools required
- Limited range of wire sizes
- Each contact has a selectively annealed area which is crushed during assembly by specialized tooling to ensure proper termination of the wire to the contact.
- Commonly used for field termination or repair, as no soldering is required.
- Not available for sealed or hermetic connectors.

TOOLING FOR CRIMP CONTACTS

Series	Polarity	Contact diameter (mm)									
		0.5		0.7		0.9		1.3		1.6	
		Part number		Part number		Part number		Part number		Part number	
		Contact	Positioner	Contact	Positioner	Contact	Positioner	Contact	Positioner	Contact	Positioner
103	Male	200.2113	TX00.300	200.2884	TX00.304	200.2890	TX00.307	200.2402	TX00.311	-	-
	Female	200.2114	TX00.302	200.2885	TX00.305	200.2892	TX00.309	200.2214	TX00.312	-	-
105	Male	-	-	200.2884	TX00.304	200.2891	TX00.308	200.2403	TX00.338	200.1653	TX00.313
	Female	-	-	200.2886	TX00.306	200.2893	TX00.310	200.2214	TX00.312	200.1654	TX00.314
Crimp tool part number		TX00.240		TX00.240		TX00.240		TX00.240		TX00.242	

See following pages for description of crimp tool and positioner.

Please refer to www.fischerconnectors.com/technical for detailed information and assembly instructions.

103 SERIES

● = Standard

Reference	Pin layout	Number of contacts	Contact types			Insulating material	Contact ø [mm]	Wire size ²⁾		Test voltage ⁵⁾ [kV] in mated position				Rated voltage ⁴⁾ r.m.s [V]	Current ³⁾ [A]
			Solder	Crimp	PCB			Solder contacts ¹⁾	Crimp contacts	AC r.m.s		DC			
										Contact to body	Contact to contact	Contact to body	Contact to contact		
103 A Z 051		2	●	●	●	PEEK	1.3	max ø1.18mm AWG17 [1] AWG18 [16/30]	max ø1.18mm min ø0.58mm AWG18-24	1.5	2.2	2.2	3.0	≤ 250	13
103 A Z 052		3	●		●	PEEK	1.3	max ø1.18mm AWG17 [1] AWG18 [16/30]	–	1.2	1.5	1.8	2.0	≤ 250	12
103 A Z 053		4	●		●	PEEK	0.9	max ø0.79mm AWG21 [1] AWG22 [7/30]	–	1.2	1.6	2.0	2.4	≤ 250	7.0
103 A Z 054		5	●	●	●	PEEK	0.9	max ø0.79mm AWG21 [1] AWG22 [7/30]	max ø0.83mm min ø0.48mm AWG22-26	1.1	1.4	1.9	2.2	≤ 250	6.8
103 A Z 056		6	●	●	●	PEEK	0.7	max ø0.79mm AWG21 [1] AWG22 [7/30]	max ø0.62mm min ø0.38mm AWG24-28	1.0	1.3	2.0	2.0	≤ 250	5.2
103 A Z 057		7	●	●	●	PEEK	0.7	max ø0.79mm AWG21 [1] AWG22 [7/30]	max ø0.62mm min ø0.38mm AWG24-28	1.0	1.3	2.0	2.0	≤ 250	5.0
103 A Z 058		8	●		●	PEEK	0.7	max ø0.79mm AWG21 [1] AWG22 [7/30]	max ø0.62mm min ø0.38mm AWG24-28	0.8	1.1	1.4	1.9	≤ 200	3.8
103 A Z 062		12	●	●	●	PEEK	0.5	max ø0.43mm AWG26 [1] AWG28 [19/40]	max ø0.43mm min ø0.20mm AWG28-32	0.9	1.2	1.5	1.8	≤ 200	2.0

¹⁾ Stranding values are in brackets.²⁾ For a given AWG, the diameter of some stranded conductor designs could exceptionally be larger than the hole diameter of the barrel. Testing may be required.³⁾ Current per contact at 40°C temperature rise measured on the basic curve according to IEC 60512-5-2-5b. For the max. operating current a reduction factor must be used and limitations due to the size of the wires and the permissible upper temperature limit of the materials employed must be taken into account. See page A-12 for details.⁴⁾ Recommended operating voltage at sea level measured according to IEC 60664-1.⁵⁾ Measured with ST-S plug and ST-D receptacle. Please contact us for rating for ST-WSO right-angle plugs and ST-WDE bulkhead feedthroughs.

105 SERIES

● = Standard

Reference	Pin layout	Number of contacts		Contact types		Insulating material	Contact ø [mm]	Wire size ²⁾		Test voltage ⁶⁾ [kV] in mated position				Rated voltage ⁴⁾ r.m.s [V]	Current ³⁾ [A]
										AC r.m.s		DC			
				Solder	Crimp			PCB	Solder contact ¹⁾	Crimp contacts	Contact to body	Contact to contact	Contact to body		
105 ^A _Z 051		2				PEEK	2.0	max ø2.03mm AWG13 [1] AWG14 [7/22]	–	2.5	3.0	4.0	4.0	≤ 630	26
105 ^A _Z 087		2				PEEK	3.0	max ø3.13mm AWG9 [1] AWG10 [105/30]	–	1.2	1.6	2.3	3.0	≤ 400	30
105 ^A _Z 052		3				PEEK	2.0	max ø2.03mm AWG13 [1] AWG14 [7/22]	–	2.0	2.5	3.0	3.5	≤ 400	23
105 ^A _Z 053		4				PEEK	2.0	max ø2.03mm AWG13 [1] AWG14 [7/22]	–	1.8	1.8	2.6	2.6	≤ 320	20
105 ^A _Z 054 ⁵⁾		7				PEEK	2.0	max ø2.03mm AWG13 [1] AWG14 [7/22]	–	3.0	2.0	4.0	3.0	≤ 320	25
		6					1.3	max ø1.18mm AWG17 [1] AWG18 [16/30]	–	1.8	1.5	2.5	2.0		7.0
105 ^A _Z 067		8				PEEK	1.3	max ø1.18mm AWG17 [1] AWG18 [16/30]	–	1.7	2.0	2.5	2.8	≤ 320	10
105 A 124		8				PEEK	2.3	max ø2.48mm AWG11 [1] AWG12 [7/20]	–	1.2	2.2	1.8	3.2	≤ 250	18.5
		6					1.3	max ø1.18mm AWG17 [1] AWG18 [16/30]	–	1.2	1.2	1.8	1.8		7.5
105 ^A _Z 101 ⁵⁾		9				PEEK	2.0	max ø2.03mm AWG13 [1] AWG14 [7/22]	–	3.0	2.0	4.0	3.0	≤ 320	25
		8					1.3	max ø1.18mm AWG17 [1] AWG18 [16/30]	–	1.8	1.5	2.5	2.0		5.0

¹⁾ Stranding values are in brackets.²⁾ For a given AWG, the diameter of some stranded conductor designs could exceptionally be larger than the hole diameter of the barrel. Testing may be required.³⁾ Current per contact at 40°C temperature rise measured on the basic curve according to IEC 60512-5-2-5b. For the max. operating current a reduction factor must be used and limitations due to the size of the wires and the permissible upper temperature limit of the materials employed must be taken into account. See page A-12 for details.⁴⁾ Recommended operating voltage at sea level measured according to IEC 60664-1.⁵⁾ Contact dia. 2.0 is positioned to make contact first and break last.⁶⁾ Measured with S plug and D receptacle.

105 SERIES

● = Standard

Reference	Pin layout	Number of contacts		Contact types		Insulating material	Contact ø <i>[mm]</i>	Wire size ²⁾		Test voltage ⁸⁾ [kV] in mated position				Rated voltage ⁴⁾ r.m.s [V]	Current ³⁾ [A]	
										AC r.m.s		DC				
				Solder	Crimp			PCB	Solder contacts ¹⁾	Crimp contacts	Contact to body	Contact to contact	Contact to body			Contact to contact
105 A Z 062		10		●	●	●	PEEK	1.3	max ø1.18mm AWG17 [1] AWG18 [16/30]	max ø1.18mm min ø0.58mm AWG18-24	1.7	2.0	2.5	2.7	≤ 320	9.0
105 A Z 069		12		●		●	PEEK	1.3	max ø1.18mm AWG17 [1] AWG18 [16/30]	-	1.4	1.5	1.8	2.0	≤ 250	8.0
105 A Z 104 ⁵⁾		13	3	●		●	PEEK	1.3	max ø1.18mm AWG17 [1] AWG18 [16/30]	-	2.5	1.5	3.8	2.2	≤ 320	14
			10					0.7	max ø0.79mm AWG21 [1] AWG22 [7/30]	-	1.3	1.5	1.8	2.2		1.0
105 A 127 ⁷⁾		13	3		●		PEEK	1.3	-	max ø1.18mm min ø0.58mm AWG18-24	3.0	2.8	4.8	3.9	≤ 320	14
			10					0.7	-	max ø0.62mm min ø0.38mm AWG24-28	3.1	1.1	4.7	1.9		1.0
105 A Z 058		15		●	●	●	PEEK	0.9	max ø0.79mm AWG21 [1] AWG22 [7/30]	max ø0.83mm min ø0.48mm AWG22-26	1.4	1.6	1.8	2.2	≤ 250	5.3
105 A Z 110 ⁶⁾		16	4	●		●	PEEK	1.6	max ø1.86mm AWG13 [1] AWG14 [7/22]	-	1.6	1.3	2.8	2.1	≤ 250	14
			12					0.7	max ø0.79mm AWG21 [1] AWG22 [7/30]	-	1.0	1.2	1.5	2.0		1.0
105 A Z 038		18		●	●	●	PEEK	0.9	max ø0.79mm AWG21 [1] AWG22 [7/30]	max ø0.83mm min ø0.48mm AWG22-26	1.4	1.6	1.8	2.2	≤ 200	4.5
105 A Z 093		24		●		●	PBT	0.7	max ø0.79mm AWG21 [1] AWG22 [7/30]	-	1.2	1.5	1.5	2.0	≤ 250	3.5
105 A Z 102		27		●	●	●	PEEK	0.7	max ø0.79mm AWG21 [1] AWG22 [7/30]	max ø0.62mm min ø0.38mm AWG24-28	1.2	1.5	1.5	2.0	≤ 250	3.0

¹⁾ Stranding values are in brackets.²⁾ For a given AWG, the diameter of some stranded conductor designs could exceptionally be larger than the hole diameter of the barrel. Testing may be required.³⁾ Current per contact at 40°C temperature rise measured on the basic curve according to IEC 60512-5-2-5b. For the max. operating current a reduction factor must be used and limitations due to the size of the wires and the permissible upper temperature limit of the materials employed must be taken into account. See page A-12 for details.⁴⁾ Recommended operating voltage at sea level measured according to IEC 60664-1.⁵⁾ Contacts dia. 1.3 are positioned to make contact first and break last.⁶⁾ Contacts dia. 1.6 are positioned to make contact first and break last.⁷⁾ Inverted polarity: female contacts on plug/male contact on receptacle⁸⁾ Measured with S plug and D receptacle.

107 SERIES

● = Standard ○ = Option


Reference	Pin layout	Number of contacts		Contact types			Insulating material	Contact ø [mm]	Wire size ²⁾		Test voltage ⁵⁾ [kV] in mated position				Rated voltage ⁴⁾ r.m.s [V]	Current ³⁾ [A]
											AC r.m.s		DC			
				Solder	Crimp	PCB			Male solder contacts ¹⁾	Female solder contacts ¹⁾	Contact to body	Contact to contact	Contact to body	Contact to contact		
107 ^A / _Z 013		4	●			PEEK	2.3	max ø2.93mm AWG9 [1] AWG10 [37/26]	max ø2.28mm AWG12 [1] AWG14 [105/34]	3.6	4.3	5.0	5.6	≤ 1000	26	
107 ^A / _Z 018		6	●			PEEK	2.3	max ø2.93mm AWG9 [1] AWG10 [37/26]	max ø2.28mm AWG12 [1] AWG14 [105/34]	3.4	3.4	4.3	4.3	≤ 800	25	
107 ^A / _Z 015		19	●			PEEK	2.0	max ø2.08mm AWG12 [1] AWG14 [7/22]	max ø2.03mm AWG13 [1] AWG14 [7/22]	2.0	2.5	2.5	3.2	≤ 500	13	
107 ^A / _Z 051		27	●			PEEK	1.3	max ø1.18mm AWG17 [1] AWG18 [16/30]	max ø1.18mm AWG17 [1] AWG18 [16/30]	2.0	2.0	3.0	3.2	≤ 400	7.5	
107 ^A / _Z 052		40	●			PEEK	1.3	max ø1.18mm AWG17 [1] AWG18 [16/30]	max ø1.18mm AWG17 [1] AWG18 [16/30]	1.8	1.5	2.5	2.0	≤ 320	6.5	
107 ^A / _Z 023		8	●			PEEK	1.3	max ø1.18mm AWG17 [1] AWG18 [16/30]	max ø1.18mm AWG17 [1] AWG18 [16/30]	2.0	1.8	2.8	2.5	≤ 400	7.0	
		47					0.9	max ø0.79mm AWG21 [1] AWG22 [7/30]	max ø0.88mm AWG20 [1] AWG22 [19/34]	1.7	1.5	2.5	2.1		3.0	

¹⁾ Stranding values are in brackets.²⁾ For a given AWG, the diameter of some stranded conductor designs could exceptionally be larger than the hole diameter of the barrel. Testing may be required.³⁾ Current per contact at 40°C temperature rise measured on the basic curve according to IEC 60512-5-2-5b. For the max. operating current a reduction factor must be used and limitations due to the size of the wires and the permissible upper temperature limit of the materials employed must be taken into account. See page A-12 for details.⁴⁾ Recommended operating voltage at sea level measured according to IEC 60664-1.⁵⁾ Measured with S plug and D receptacle.

MECHANICAL CODING

For easy connect/disconnect operations

Our contact blocks are engineered with arc-shape metal guides, which ensure precise alignment of connectors during the mating process.




This guiding mechanism provides:

- Increased safety and user friendliness by preventing misconnection.
- Easy mating cycles, can be blind-mated.

Keying codes option

All Multipole body styles are mechanically coded.
Code 1 is the standard, but other codes can be requested.

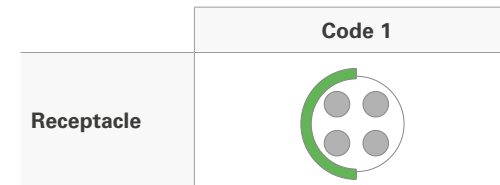

Other keying codes are available on request, please contact us.
Images are for reference only.

MULTIPOLE LOW VOLTAGE OPTIONS

OPTIONS

1	Housing color Which housing color do you need?	Natural Stainless steel	
2	Contact block material Which contact block material do you need?	PEEK	
3	Contact type Which contact type do you need?	Solder	Crimp¹⁾
4	Keying code Which keying code do you need?	Code 1 	-130 -150

¹⁾ Crimp contacts are not an option for sealed or hermetic connectors.

CONTACT TYPE FOR PANEL MOUNTED CONNECTORS

Applicable for	Last digit	Description
Front mounted : ST-DBEE	0	Standard : solder contacts
	9	With PCB (Printed Circuit Board) contacts instead of solder contacts
Rear mounted : ST-DBPE	0	Standard : PCB (Printed Circuit Board) contacts
	9	With solder contacts instead of PCB (Printed Circuit Board) contacts

Options are available on request, please contact us.

ORDERING INFORMATION

How to build a part number

Refer to the table aside to find the information you need to build the part number to order your selected connector.

For customized solutions, please contact us.

CONNECTORS PARTS

Part system	Body style	Size	Polarity
-------------	------------	------	----------

PART NUMBER EXAMPLES

Plug	ST- S	103	A
------	-------	-----	---

ST- S cable mounted plug in Series 103 with 6 (multipole) low voltage male contacts and following options.

Receptacle	ST- DBEE	103	A
------------	----------	-----	---

ST- DBEE panel mounted receptacle in Series 103 with 6 (multipole) low voltage female contacts and following options.

▼	▼	▼
Cable mounted plugs	Series	As standard rule
ST-S ST-ST	103 105 107	A = male contacts on plug and female contacts on receptacle Z = female contacts on plug and male contacts on receptacle
Panel mounted receptacles	See page B 7-3 or Technical dimensions B 7-5	See page B 7-10
ST-DBEE ST-DBPE ST-WDE		

ORDERING INFORMATION

Contact configuration	Options	Cable clamp sets for cable mounted plugs & receptacles
056	-130	+
	Stainless steel housing, PEEK contact blocks with solder contacts, keying code 1 and clamp nut without bend relief.	
056	-130E	Not applicable as panel mounted
	Stainless steel housing, PEEK contact blocks with solder contacts and keying code 1.	
▼	▼	▼
Three-digit number specific for each pin layout	Specific suffix corresponding to selected options	Below cable clamp sets should be ordered separately
	Housing color	Multipole low voltage
See page B 7-13	Natural Stainless Steel	Example: ST- S 103 A056-130+
	Contact block insulating material	Clamp set ordering line E31 103.1/6.7+B
	PEEK	See page B 7-20
	Contact type	
	Solder Crimp PCB	
	Keying code of the contact block	
	Clamp nut type & color	
	Other options	
	See page B 7-17	

RELATED ITEMS

Accessories	Tooling
	
Ex: ST-CR105C 2C3 A150	Ex: TX00.240
Stainless steel cap	Crimping tool
▼	▼
Protective sleeves Soft caps Metal caps Spacers Washers Mounting nuts	Spanners / Wrenches Crimping tools Tools for crimp contacts and high voltage contacts
See page B 7-24	See page B 7-12

CABLE CLAMP SETS



To guarantee excellent cable retention and strain relief, Fischer Connectors provides robust and high quality cable clamp sets :

- Collet style clamp system retaining cable over large jacket surface area.
- Protection of small diameters and delicate conductors.

Cable clamp sets are suitable for all cable mounted connectors.

RANGE OVERVIEW: S, U & E CABLE CLAMP SETS

Fischer Connectors offers three types of cable clamps sets.
The table below will help you select the one corresponding to your needs.

Cable clamp set	Do you need the interface between the cable and the connector to be sealed ?		Do you need the connector to be terminated to the cable shield ?	
	Unsealed	Sealed	Unshielded	Shielded
S - Shielded	●			●
U - Unshielded	●		●	
E - Environmental		●	●	●

For 107 Series connectors, only S and E cable clamp sets are available.


PART NUMBERING

Cable clamp sets below should be ordered separately
Multipole low voltage
ST- S 103 A056-130+
Examples connector ordering line
ST- S103 A056-130+
Clamp set ordering line
E3 102.5/2.0

See following pages for cable clamp sets selection.

103 SERIES**S**
SHIELDED

Shielded cable clamp with spacer and sleeve.

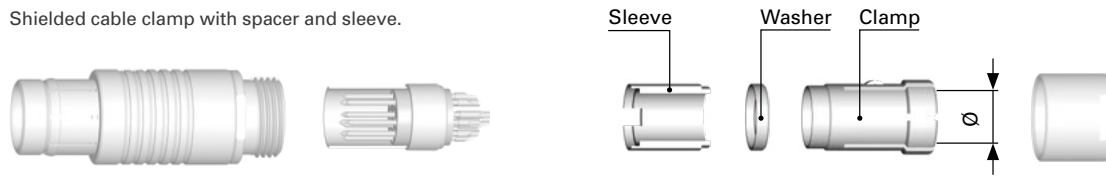

Cable dia. range	Collet Ø	Cable clamp set
1.7 - 2.2	2.2	E31 103.1/2.2 + B
2.2 - 2.7	2.7	E31 103.1/2.7 + B
2.7 - 3.2	3.2	E31 103.1/3.2 + B
3.2 - 3.7	3.7	E31 103.1/3.7 + B
3.7 - 4.2	4.2	E31 103.1/4.2 + B
4.2 - 4.7	4.7	E31 103.1/4.7 + B
4.7 - 5.2	5.2	E31 103.1/5.2 + B
5.2 - 5.7	5.7	E31 103.1/5.7 + B
5.7 - 6.2	6.2	E31 103.1/6.2 + B
6.2 - 6.7	6.7	E31 103.1/6.7 + B

U
UNSHIELDED


Unshielded, one-piece cable clamp.



Cable dia. range	Collet Ø	Cable clamp set
2.2 - 3.2	3.2	E3 103.6/3.2
3.2 - 4.2	4.2	E3 103.6/4.2
4.2 - 4.7	4.7	E3 103.6/4.7
4.7 - 5.2	5.2	E3 103.6/5.2
5.2 - 5.7	5.7	E3 103.6/5.7
5.7 - 6.2	6.2	E3 103.6/6.2
6.2 - 6.7	6.7	E3 103.6/6.7

E
ENVIRONMENTAL


Environmentally sealed clamp for use with shielded or unshielded cables.

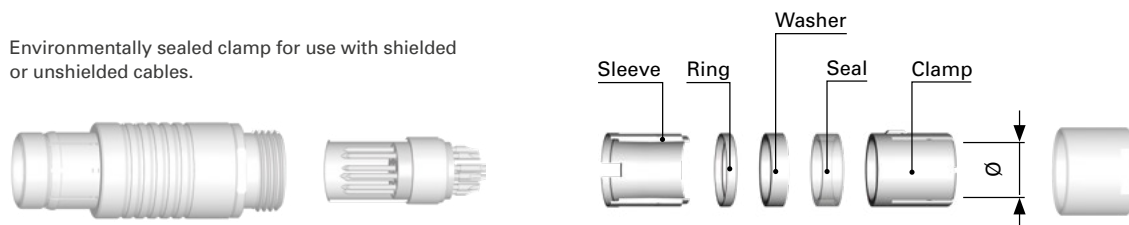

Cable dia. range	Collet Ø	Cable clamp set
1.7 - 2.2	2.2	E31 103.2/2.2 + B
2.2 - 2.7	2.7	E31 103.2/2.7 + B
2.7 - 3.2	3.2	E31 103.2/3.2 + B
3.2 - 3.7	3.7	E31 103.2/3.7 + B
3.7 - 4.2	4.2	E31 103.2/4.2 + B
4.2 - 4.7	4.7	E31 103.2/4.7 + B
4.7 - 5.2	5.2	E31 103.2/5.2 + B
5.2 - 5.7	5.7	E31 103.2/5.7 + B
5.7 - 6.2	6.2	E31 103.2/6.2 + B

105 SERIES**S**
SHIELDED


Shielded cable clamp with spacer and sleeve.

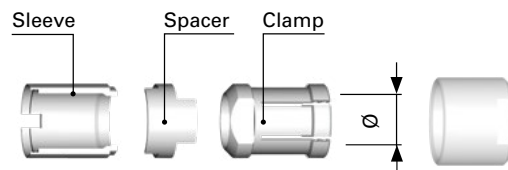

Cable dia. range	Collet Ø	Cable clamp set
3.2 - 4.2	4.2	E3 105.1/4.2 + B
4.2 - 5.2	5.2	E3 105.1/5.2 + B
5.2 - 6.2	6.2	E3 105.1/6.2 + B
6.2 - 7.2	7.2	E3 105.1/7.2 + B
7.2 - 8.2	8.2	E3 105.1/8.2 + B
8.2 - 9.2	9.2	E3 105.1/9.2 + B
9.2 - 10.0	10.0	E3 105.1/10.0 + B
10.0 - 10.7	10.7	E3 105.1/10.7 + B

U
UNSHIELDED


Unshielded, one-piece cable clamp.

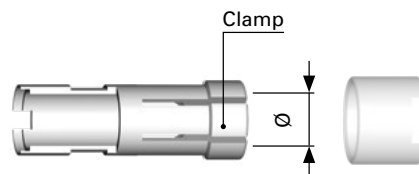

Cable dia. range	Collet Ø	Cable clamp set
2.5 - 3.5	3.5	E3 105.6/3.5
3.5 - 4.5	4.5	E3 105.6/4.5
4.5 - 5.5	5.5	E3 105.6/5.5
5.5 - 6.5	6.5	E3 105.6/6.5
6.5 - 7.5	7.5	E3 105.6/7.5
7.5 - 8.5	8.5	E3 105.6/8.5
8.5 - 9.5	9.5	E3 105.6/9.5
9.5 - 10.5	10.5	E3 105.6/10.5

E
ENVIRONMENTAL

Environmentally sealed clamp for use with shielded or unshielded cables.

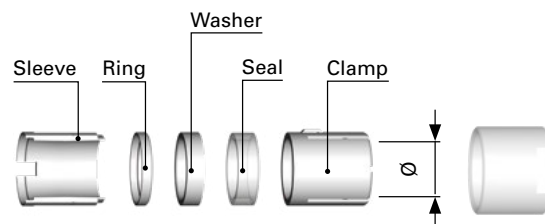


Cable dia. range	Collet Ø	Cable clamp set
3.2 - 4.2	4.2	E31 105.2/4.2 + B
4.2 - 5.2	5.2	E31 105.2/5.2 + B
5.2 - 6.2	6.2	E31 105.2/6.2 + B
6.2 - 7.2	7.2	E31 105.2/7.2 + B
7.2 - 8.2	8.2	E31 105.2/8.2 + B
8.2 - 9.2	9.2	E31 105.2/9.2 + B
9.2 - 10.0	10.0	E31 105.2/10.0 + B
10.0 - 10.7	10.7	E31 105.2/10.7 + B

107 SERIES

S SHIELDED

Shielded cable clamp with spacer and sleeve.

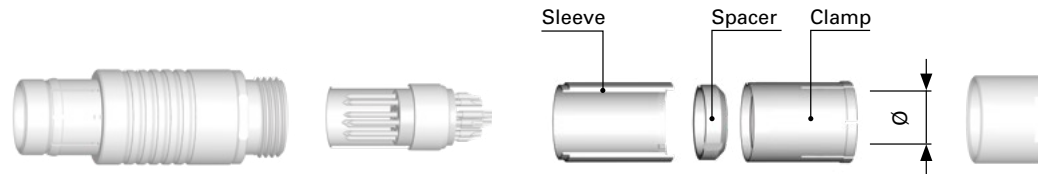


Cable dia. range	Collet Ø	Cable clamp set
5.7 - 7.2	7.2	E3 107.1/7.2
7.2 - 8.2	8.2	E3 107.1/8.2
8.2 - 9.2	9.2	E3 107.1/9.2
9.2 - 10.2	10.2	E3 107.1/10.2
10.2 - 11.2	11.2	E3 107.1/11.2

Cable dia. range	Collet Ø	Cable clamp set
11.2 - 12.2	12.2	E3 107.1/12.2
12.2 - 13.2	13.2	E3 107.1/13.2
13.2 - 14.2	14.2	E3 107.1/14.2
14.2 - 15.2	15.2	E3 107.1/15.2
15.2 - 16.2	16.2	E3 107.1/16.2

Cable dia. range	Collet Ø	Cable clamp set
16.2 - 17.2	17.2	E3 107.1/17.2
17.2 - 18.2	18.2	E3 107.1/18.2
18.2 - 19.2	19.2	E3 107.1/19.2
19.2 - 20.2	20.2	E3 107.1/20.2
20.2 - 21.2	21.2	E3 107.1/21.2
21.2 - 22.7	22.7	E3 107.1/22.7

E ENVIRONMENTAL

Environmentally sealed clamp for use with shielded or unshielded cables.

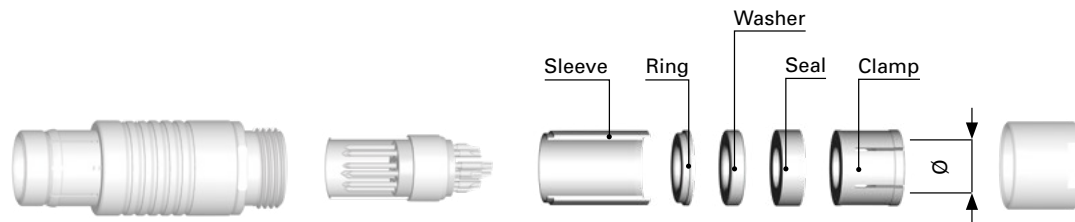


Cable dia. range	Collet Ø	Cable clamp set
5.7 - 7.2	7.2	E3 107.2/7.2
7.2 - 8.2	8.2	E3 107.2/8.2
8.2 - 9.2	9.2	E3 107.2/9.2
9.2 - 10.2	10.2	E3 107.2/10.2
10.2 - 11.2	11.2	E3 107.2/11.2

Cable dia. range	Collet Ø	Cable clamp set
11.2 - 12.2	12.2	E3 107.2/12.2
12.2 - 13.2	13.2	E3 107.2/13.2
13.2 - 14.2	14.2	E3 107.2/14.2
14.2 - 15.2	15.2	E3 107.2/15.2
15.2 - 16.2	16.2	E3 107.2/16.2

Cable dia. range	Collet Ø	Cable clamp set
16.2 - 17.2	17.2	E3 107.2/17.2
17.2 - 18.2	18.2	E3 107.2/18.2
18.2 - 19.2	19.2	E3 107.2/19.2
19.2 - 20.2	20.2	E3 107.2/20.2
20.2 - 21.2	21.2	E3 107.2/21.2
21.2 - 22.7	22.7	E3 107.2/22.7

STAINLESS STEEL CAPS


FOR PLUGS

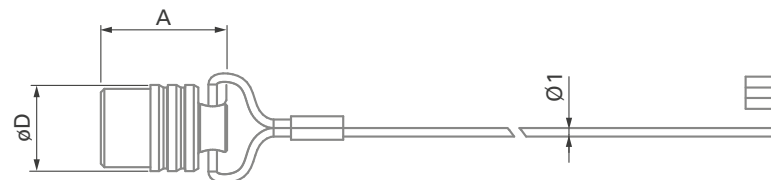

Series	Part number	O-ring material	Caps		Stainless steel cable		Crimp ferrule
			A	D	Length	Covering material	Part number
103	ST-CP103C 2C3 A100	EPDM	21	13	100	FEP - Teflon®	300.922
105	ST-CP105C 2C3 A150		29	20	150		
107	ST-CP107C 2C3 A350		47	40	350		

Material - Cap: Stainless steel 316L – Crimp ferrule: aluminium

FOR RECEPTACLES

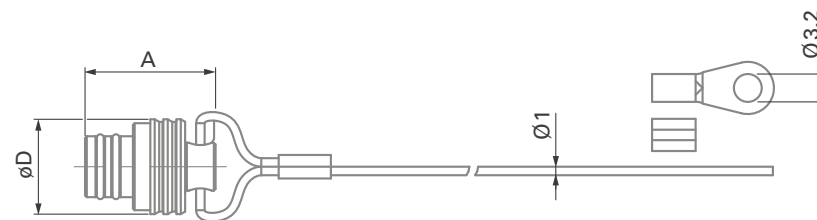

Series	Part number	O-ring material	Caps		Stainless steel cable		Crimp ferrule	Crimp lug
			A	D	Length	Covering material	Part number	Part number
103	ST-CR103C 2C3 A100	EPDM	13	15	100	FEP - Teflon®	300.922	300.299
105	ST-CR105C 2C3 A150		21	19	150			
107	ST-CR107C 2C3 A350		26	36	350			

Material - Cap: Stainless steel 316L – Crimp ferrule: aluminium

They protect and seal the mating face of the plugs and receptacles.

To attach the ferrule or the crimp lug to the stainless steel cable, use a crimp tool, a vice or a pair of pliers with parallel jaws.

Other available accessories listed on page B7-30. Cable strain relief, Protective Boots, sealing caps)Plasticx, Soft caps).

SPANNERS & NUTDRIVER**DOUBLE-END OPEN SPANNER**
EXTRA THIN 

Part number	Opening across flats	Length	Fork thickness
TX00.010	10	104	2.5
TX00.014	14	130	3.0

Material – Chrome alloy steel, chrome plated, fork angles – 15° and 75°

OPEN-END SPANNER
EXTRA THIN 

Part number	Opening across flats	Length	Fork thickness
TX00.015	15	145	5.2
TX00.016	16	160	3.2
TX00.017	17	160	5.5
TX00.022	22	196	6.5
TX00.032	32	270	8.0

Material – Chrome vanadium steel, chrome plated, fork angle – 15°

HOOK SPANNER
FOR SIDE SLOTTED NUTS 

Part number	Thread size	Nut outer dia.
TX00.107	M35x1 / M36x1	39 – 43

Material – Hardened tool steel, gunmetal finish

NUTDRIVER WITH T-HANDLE
AND HEX DRIVE **FOR DECORATIVE SLOTTED NUTS** 

Part number	Thread size	Nut outer dia.	D	Hex drive
TG00.001	M14 x 1	18	21	10

Material – Hardened tool steel, nickel plated

All dimensions and images shown are in millimeters and are for reference only.

CRIMPING TOOLS

CRIMP TOOL ULTRA PRECISION

FOR CLOSED CRIMP TERMINATION



Part number	Contact dia.	Crimp tool
TX00.240	0.5	BALMAR 18 - 000 or DANIELS MH - 800
	0.7	
	0.9	
	1.3	
TX00.242	1.6	ASTRO TOOL 615708

The best choice of precision crimp tools for highly reliable eight indenter crimping per US-MIL, IEC and DIN Specifications. Positioners have to be ordered according to contact.

Standards

IEC 60203 / DIN 41 611, Part 3 / MIL-C-22520, Class I, Type 1

POSITIONER

SUITABLE FOR CRIMP TOOL TX00.240



SUITABLE FOR CRIMP TOOL TX00.242



For the choice of Fischer Connectors' positioner, please refer to section "Tooling", page B 2-26.

FOR CRIMP CONTACTS**CONTACT
INSERTION TOOL**

Part number	Contact dia.	Description
TX00.214	0.5	Tool for inserting male and female removable crimp contacts into the contact block. Especially recommended for small gauge and fragile wires.
TX00.210	0.7	
TX00.211	0.9	
TX00.273	1.3	

Material

Handle: black POM (Delrin®)
Fork: tool steel, chrome plated

**CONTACT
EXTRACTION TOOL**

Part number	Contact dia.	Description
TX00.213	0.5	Tool for extracting male and female removable crimp contacts from the contact block. The sleeve of this tool is pushed over the contact, to release the contact retaining mechanism. The tool plunger is then pushed to eject the contact.
TX00.200	0.7	
TX00.205	0.9	
TX00.212	1.3	
TX00.201	1.6	

Material

Housing and plunger: black POM (Delrin®)
Sleeve: stainless steel
Slide: tool steel

MATERIAL & SURFACE TREATMENT

Metal parts

Metal parts		Material			Finish	
		Designation	ISO	Standard	Designation	Standard
Shell (Housing), clamp nut, decorative slotted nut		Stainless steel	X2CrNiMo17-12-2	316L/1.4404	-	-
Cable clamp, inner sleeve, spacers and rings, nuts and washers		Brass	CuZn39Pb3	CW614N / UNS C 38500	Nickel	SAE-AMS-QQ-N-290 / SAE-AMS2404
Contacts	Male (solder)	Brass	CuZn39Pb3	CW614N / UNS C 38500	1 µm Gold over Nickel	MIL-DTL-45204D / Type 1 + ASTM B488
	Female, Male (crimp)	Bronze	CuSn4Zn4Pb4	CW456K / ASTM B 139 / UNS C 54400		

Other material and surface treatments are available on request.

Insulator and sealing

Contact blocks and other insulators for our standard connectors are manufactured from high performance engineering plastic materials. The standard materials for each connector series are listed under Electrical & contact configurations in pages B 7-13 through B 7-16. Ceramics and other dielectrics are available on special order.

Insulator and sealing	International symbol	Flammability
Insulator	PEEK	UL 94 V-O
Panel and contact block O-rings (receptacles)	FPM (Viton®)	-
Interface O-rings (receptacles)	EPDM	-
Sealant material - IP68 (receptacles) - Hermetic	Silicon compound Epoxy compound	UL 94 V-O UL 94 HB
Cable sealing (plugs) - IP68	TPE-S	UL 94 HB

Our products are RoHs compliant and conform with the EC Directives 2002/95/EC.

ENVIRONMENTAL & MECHANICAL DATA

Characteristic	Product type	Value	Standard
Sealing performance	Unsealed connectors (mated)	IP50	IEC 60529
	Plugs (mated) with general purpose sealed clamps ¹⁾	IP68 IP69	
	Receptacles "U" body style	IP68	
	Receptacles "E" body style	Hermetic: Tested: <10 ⁻⁸ mbar l/s	IEC 60068-2-17 test Qk method 3, alternative b
		IP69	IEC 60529
Operating temperature range	See details on page A-9 and page B7-30		IEC 60512-6-11 i+j / IEC 60068-2-14-Nb
Corrosion resistance		Salt mist, 1000 hours, 5% salt solution, 35°C	IEC 60068-2-11 test Ka MIL-STD-202 method 101 condition A
Endurance		5000 mating cycles	IEC 60512-9-1 / EIA-364-09
Vibration		10 to 2000 Hz, 1.5 mm or 15g, 12 sweep cycles per axis, 20 minutes per 10-2000-10 Hz sweep cycle, no discontinuity > 1us	MIL-STD-202 method 204 condition B
Radiation resistance ²⁾	Unsealed connectors	PEEK: 10 ⁷ Gy (= 1000M Rads)	
	Sealed receptacles "E"	FPM (Viton®) O-rings 10 ⁵ Gy (= 10M Rads)	

¹⁾ The sealing performance can be affected by the long term quality of the cable.

²⁾ For information only. Not tested by Fischer Connectors.

Most of our connectors are completely sterilizable in autoclave, Cidex®, EtO, gamma radiation, Steris® or Sterrad®. Please contact us for more details.
For more information visit: www.fischerconnectors.com

ELECTRICAL DATA


Characteristic	Contact size	Typical values	Standard
Contact resistance 5,000 mating cycles	ø 0.5 mm	5.0 mΩ	IEC 60512-2-1, Test 2a IEC 60512-2-2, Test 2b
	ø 0.7 mm	5.0 mΩ	
	ø 0.9 mm	4.0 mΩ	
	ø 1.3 mm	2.5 mΩ	
	ø 1.6 mm	2.5 mΩ	
	ø 2.3 mm	2.5 mΩ	
	ø 3.0 mm	1.5 mΩ	
Insulation resistance		> 10 ¹⁰ Ω	IEC 60512-3-1-3a Method C

All dimensions and images shown are in millimeters and are for reference only.

OPERATING TEMPERATURES

The temperature ranges quoted by the manufacturers of the plastic materials are usually the absolute maximum values. When exposed to the mechanical and electrical stresses present in a connector, these values are often unachievable.

If a composite connector system including accessories is used, then the item with the lowest temperature performance will dictate the operating temperature limit of the system. The table below shows our recommended operating temperature ranges.

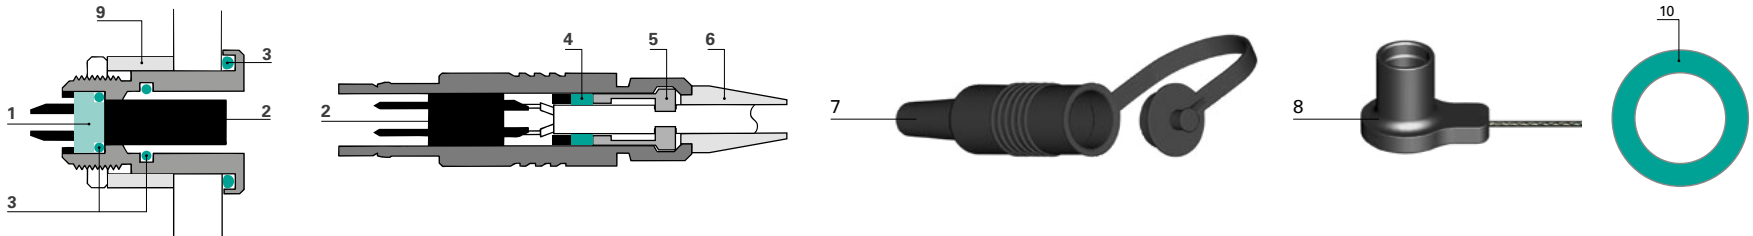

Ref.	Component	Material		Operating temperatures
1	Sealant	"U" Type		-55°C to +200°C
		"E" Type		-65°C to +150°C
2	Insulator	PEEK		-65°C to +250°C
3	Panel and contact block O-rings	FPM (Viton®)		-20°C to +200°C ¹⁾
	Interface O-rings	EPDM		-50°C to +160°C ²⁾
4	Cable Clamp Seal	TPE		-70°C to +130°C
5	Cable Clamp	Brass		
6	Cable Strain Relief	TPE		-60°C to +100°C
		VMQ - Silicone rubber		-60°C to +180°C
7	Protective Boots	TPE		-60°C to +100°C
8	Sealing Caps	Metallic	Plug: Stainless steel with EPDM O-ring	-20°C to +200°C ¹⁾
			Receptacle: Stainless steel with EPDM O-ring	-30°C to +110°C ¹⁾
		Plastic	POM with FPM O-ring	-20°C to +100°C ¹⁾
		Soft Caps	TPE	-20°C to +85°C
9	Panel Spacer	Aluminium		
10	Color Coding Washer	PP		-20°C to +60°C

¹⁾ Minimum mating temperature: 0°C.
²⁾ Minimum mating temperature: -20°C.

